

## ASW single section wall mount enclosure

### Features:

- Welded frame, reliable structure.
- Reversible 5mm toughened glass front door with lock.
- Removable side panels with side pins, side locks are optional for protection.
- Standing or wall mount installation.
- Cable entries on both of top cover and bottom panel.

### Specifications:

- Material: SPCC cold rolled steel
- Thickness: Mounting rails: 1.5mm; others: 1.2mm
- Surface finishing: Degreasing, pickling, phosphoric, powder coated
- Static loading capacity: 60kgs

### Standards:


- ANSI/EIA RS-310-D
- IEC60297-2
- DIN41494, PART1
- DIN41494, PART7
- Compatible with 19" International Standards, ETSI



Mount panel




Frame

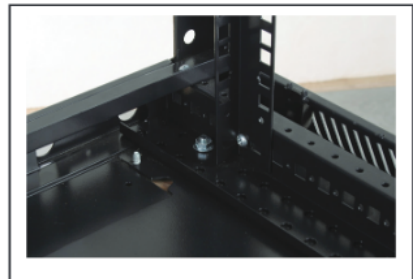

Stable structure

## ASW single section wall mount enclosure

### Structure of cabinet

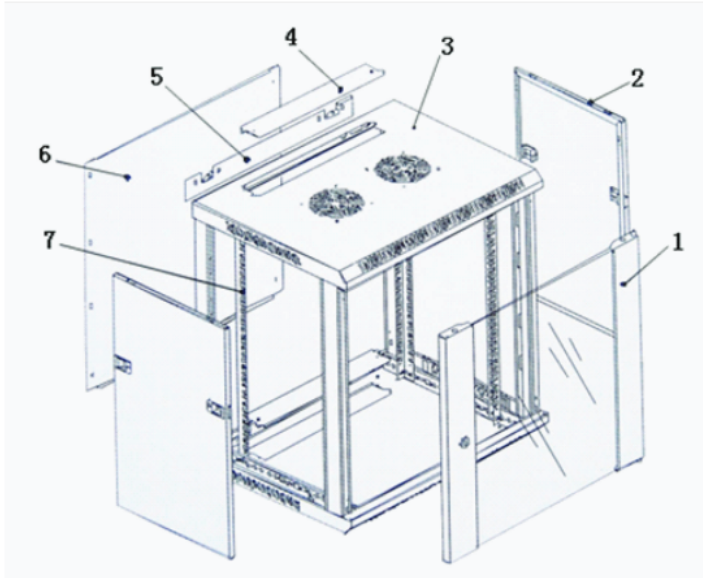

### Front door options:

- 1-1: toughened glass door, with small round lock
- 1-2: toughened glass door with stripped hole border, with small round lock
- 1-3: toughened glass door with net hole border, with spring lock
- 1-4: metal plate door, with small round lock
- 1-5: perforated door, with spring lock

### Main parts:

S/N	Specification	Qty	Unit	Material	Surface finishing	Remark
1	Toughened glass front door (1-1)	1	pc	SPCC	Powder coated	Small round lock
2	Removable side panels	2	pc	SPCC	Powder coated	---
3	Frame	1	pc	SPCC	Powder coated	---
4	Cable entry cover	2	pc	SPCC	Powder coated	---
5	Mounting panel	1	pc	SPCC	Powder coated	---
6	Back panel	1	pc	SPCC	Powder coated	---
7	Mounting rails	4	pc	SPCC	Powder coated	---
8	M6 screws and nuts	20	set	---	---	10 sets for 12U lower

### Specifications:

Model No.	Width (mm)	Depth (mm)	Capacity	Height (mm)	Assembled packing dimension (mm)	Assembled Volume (cbm)
ASW.6404	600	450	4U	280	620*470*300	0.09
ASW.6406			6U	370	620*470*390	0.13
ASW.6409			9U	500	620*470*520	0.16
ASW.6412			12U	635	620*470*655	0.2
ASW.6415			15U	770	620*470*790	0.24
ASW.6418			18U	900	620*470*920	0.28
ASW.6422			22U	1080	620*470*1100	0.34
ASW.6606			600	600	6U	370
ASW.6609	9U	500			620*620*520	0.21
ASW.6612	12U	635			620*620*655	0.26
ASW.6615	15U	770			620*620*790	0.32
ASW.6618	18U	900			620*620*920	0.37
ASW.6622	22U	1080			620*620*1100	0.44

Color : Gray: Ral7035